








# ML-300-001 / ML-600-001 / ML-1200-001

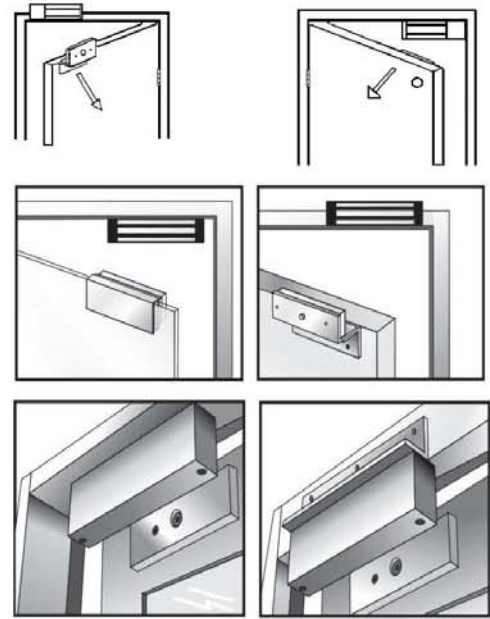

標準安裝(向外開式門)

選配L型輔助架  
安裝在窄門框

	<b>ML-300-001</b>	<b>ML-600-001</b>	<b>ML-1200-001</b>
尺寸/mm	166(L)x39(W)x21(H) 130(L)x32(W)x10(H)	250(L)x47(W)x25(H) 185(L)x38(W)x12(H)	266(L)x75.5(W)x40(H) 185(L)x61(W)x16(H)
電壓	DC12V/24V	DC12V/24V	DC12C/24V
電流	250MA/125MA	400MA/200MA	500MA/250MA
承受拉力	300 磅	600 磅	1200 磅
適用門式	單向推拉門	單向推拉門	單向推拉門
輔助架(L&Z)			
輔助架(L&Z)尺寸/mm	L: 166(L)x43(W)x33(H) Z: 166(L)x50(W)x43(H)	L: 251(L)x51(W)x33(H) Z: 190(L)x50(W)x50(H)	L: 266(L)x75(W)x48(H) Z: 190(L)x72(W)x72(H)
輔助架(L)			
輔助架(L)尺寸/mm	L: 166(L)x43(W)x33(H)	L: 251(L)x51(W)x33(H)	L: 266(L)x75(W)x48(H)

